

LED Panel
 28/60Watt 3000/4000K 130Lm/Watt
 (UGR<19 Optional)


Prof Panel



LED Flatlight: If you compare our LED Products to traditional lighting you will see that our lighting radiates less heat and has a much longer life span and a very low maintenance cost. Our products are made of quality parts and have a high energy saving level. We think quality is very important so we always make sure our products are tested and have the right certificates.

Applications: Residential areas, Corridor, Technical area, Restroom, Office rooms

Wattage	28W/60W
Luminous Flux	130(±5%)Lm/Watt
Kelvin	3000K or 4000K
Colour Rendering Index	>80
Light Source	2835 SMD 208Leds
Beam angle	120°
UGR<19	Optional
Driver	Non Flicker
Power Factor	>0,9
Voltage / Current	200-240V
IP-Code	IP20
Housing Material	Aluminum + PC
Dimensions	28W: 595 x 595 x 10mm or 295 x 1195 x 10mm 60W: 295 x 1495 x 10mm
Operation Temperature	-20 + 40°C
Lifetime	50.000h
Warranty	5 Years
Certification	CE, RoHS, EMC, LVD

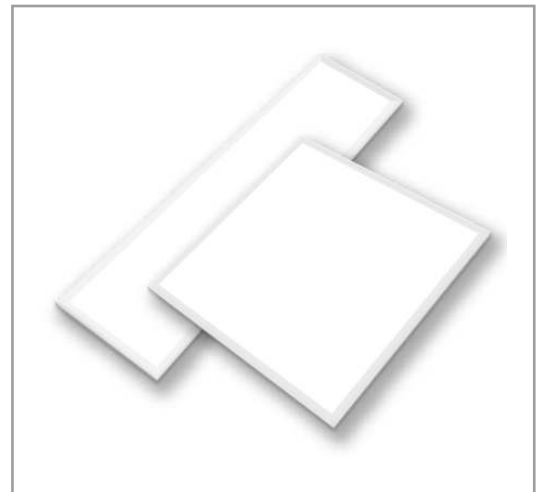

Available in:

Item/Kelvin/Size:	Item/Kelvin/Size (UGR<19):
1002220 3000K 595 x 595mm	1002212 3000K 595 x 595mm
1002280 3000K 295 x 1195mm	1002281 3000K 295 x 1195mm
1002219 4000K 595 x 595mm	1002213 4000K 595 x 595mm
1002591 3000K 295 x 1495mm	
1002592 4000K 295 x 1495mm	



All transactions with LED Flatlight BV are subject to our general terms of trading, Copies are on request. All specifications are subject to change without notice.