LED FLATLIGHT
ZILVERENBERG 37A
5234 GL 's-Hertogenbosch
(0)73 6 89 57 99
The Netherlands

LED
FLATLIGHT

Downlight

1001810   Downlight 'Mera' 20W 3000K 36° Square Cut-out 120x120mm
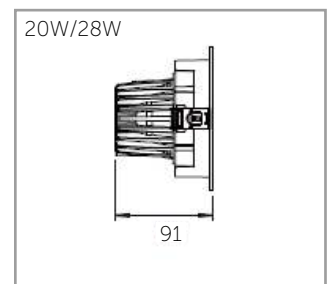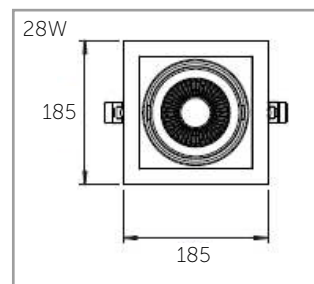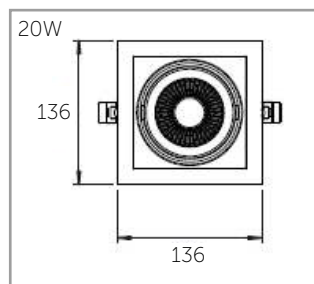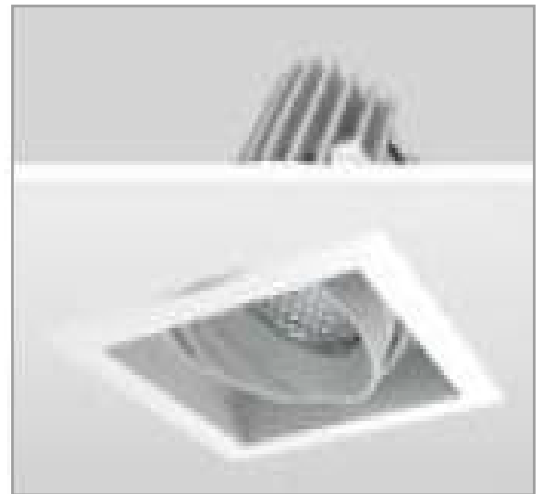1001809 Downlight 'Mera' 28W 3000K 40° Square Cut-out 165x165mm

Mera

CE RoHS
2002/95/EC

LED Flatlight: If you compare our LED Products to traditional lighting you will see that our lighting radiates less heat and has a much longer life span and a very low maintenance cost. Our products are made of quality parts and have a high energy saving level. We think quality is very important so we always make sure our products are tested and have the right certificates.

Applications: Residential areas, Corridor, Technical area, Restroom, Parking area, Offce rooms

Wattage	20/28W
Luminous Flux	2200Lm (3000K 20W)
	2280Lm (4000K 20W)
	3080Lm (3000K 28W)
	3190Lm (4000K 28W)
Kelvin	3000/4000K
Colour Rendering Index	>80 (90 optional)
Beam angle	15/28/36/40°
Driver	On board
Power Factor	>0,9
Voltage / Current	220-240V 50~60Hz
IP-Code	IP20
Dimmable	No
Housing Material	Aluminum White
Dimensions	20W 136 x 136 x 91 mm
	28W 185 x 185 x 110 mm
Working temperature	-20 + 45°C
Lifetime	50.000h
Warranty	3 Years
Certification	CE, RoHS

20/28 Watt	2200~3190 Lumen	3000 4000 Kelvin	20 IPcode	15/28/36/40

20W
136
136

28W
185
185

20W/28W
91