

DIP Switch Parking Fixture
 15-60W 120-150Lm/W CCT


Tri-Park




LED Flatlight: If you compare our LED Products to traditional lighting you will see that our lighting radiates less heat and has a much longer life span and a very low maintenance cost. Our products are made of quality parts and have a high energy saving level. We think quality is very important so we always make sure our products are tested and have the right certificates.

Applications: Parking area

Wattage	Power adjustable: See Below
Luminous Flux	120-130Lm/W or 140-150Lm/W
Kelvin	CCT Turnable: 3000K, 4000K, 5000K
Colour Rendering Index	>80
3-Phase	3-Phase (L1, L2, L3 option)
LED Source	2835 SMD
Emergency	Yes
Sensor	Microwave, PIR
Dimmable	Yes, 0-10V, Triac, Dali (Flicker free)
Beam angle	110°
Power Factor	>0,9
Voltage / Current	AC200-240V 50Hz/60Hz
IP-Code	IP66 IK10
Housing Material	Alu+ Pc cover
Dimensions	See Below
Operation Temperature	-20 + 50°C
Lifetime	75.000h L80B50 (Ta=25°C)
Warranty	5 Years
Certification	CE, RoHS, TÜV, GS, SAA, ERP

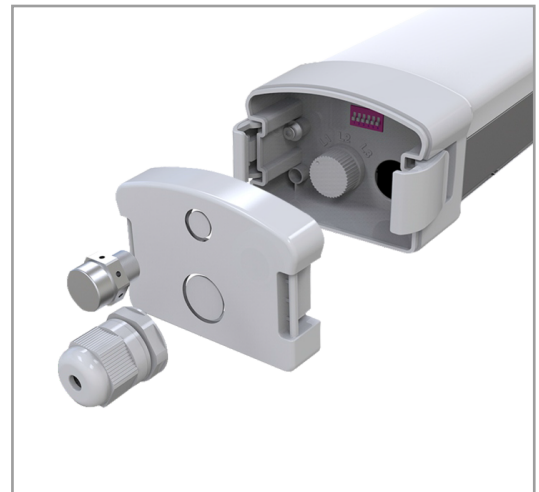

Length	A		B		C
	Min.mm	Min.mm	Max.mm	Min.mm	
600	600	91	94	69	
1200	1200	91	94	69	
1500	1500	91	94	69	
Length	Power(W)				
600	15/20/25/30				
1200	30/40/45/50				
1500	40/50/55/60				



All transactions with LED Flatlight BV are subject to our general terms of trading, Copies are on request. All specifications are subject to change without notice.